


## TECHNICAL DATA SHEET

### Cat5E UTP

PATCHSEE RJ 45 Patch Cords are designed, and individual tested for connecting the network equipment to patch panel and network user outlet. They are warranted for cat 5e TIA/EIA-568-B-2.1 June 2002 Channel test on a Permanent Link certified for transmission frequencies of up to 100 MHz.

#### PATCHSEE Concept and main characteristics

- Light identification through plastic optical fiber,
- 6 available lengths from 0.6 m up to 4.9 m
- Color of cable: black with white marking
- Color of boot: black with white marking
- Connector compatible with colour clips PATCHCLIP
- Packaging: bags of 12 pieces
- Marking on the boot: length and P/N
- Unique serial numbers marking on the cable
- Electrical performance tests performed on a sample basis (1000 Base T Warranty, Return Loss, Attenuation, NEXT, etc...)

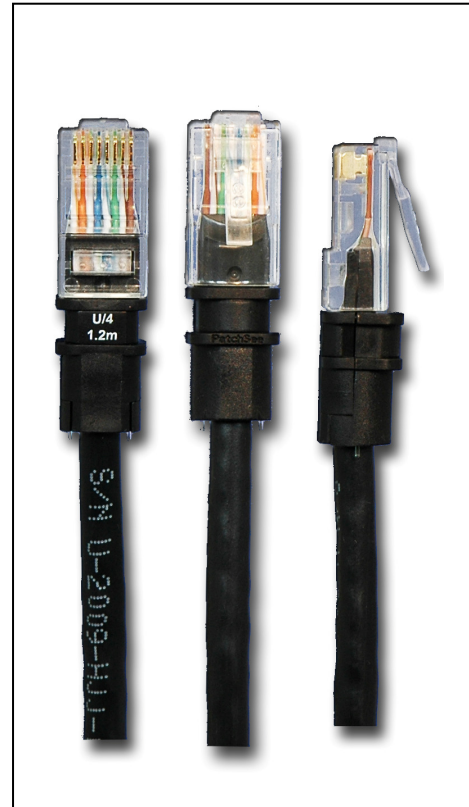

<b>Number of pairs</b>	4
<b>Conductor</b>	Stranded bare copper wire
<b>Gauge</b>	24 AWG
<b>Insulation</b>	Foam Skin Polyethylene
<b>Pair screen</b>	n/a
<b>Optical wave guide</b>	2 POF 0.5 mm
<b>Drain</b>	n/a
<b>Jacket</b>	PVC - Black with white printing
<b>Overall diameter</b>	5.8 mm
<b>Plug housing</b>	UL 1863 Polycarbonate
<b>Contacts</b>	Moved contacts
<b>Contact Plating</b>	Gold 50 µ inches gold minimum (1.2 µm)
<b>Shielding</b>	n/a
<b>Power Over Ethernet (POE)</b>	Compatible POE, POE+, et 4PPOE (See the recommendations of TSB-184-A and TIA/EIA-568.2-D)

#### Mechanical Properties of the cable

Fire Propagation Test	Temperature range During operation	Fire load	Bending radius
UL 444 VW 1 Flame test	-20 °C up to +75 °C	372 MJ/km	>25 mm without load

#### Electrical Properties of the cable (at 20 °C +/- 5 °C)

DC loop resistance	Insulation resistance (500V)	Capacitance at 800 Hz	Impedance 1-100MHz	Impedance 100-250MHz	Propagation delay	Test voltage (DC, 1 min)
< 340Ω/km	> 2000 MΩ*km	Nom. 43nF/km	100 +/- 15 Ω	NA	< 427 ns/100m	1000 V